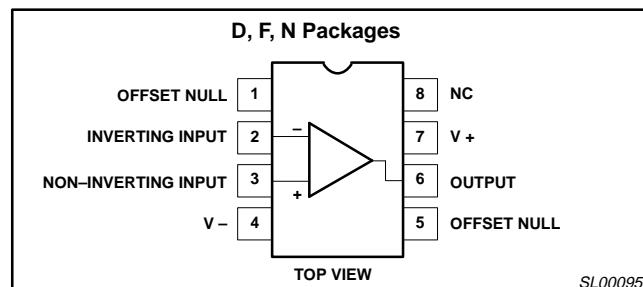


General purpose operational amplifier **μ A741/ μ A741C/SA741C****DESCRIPTION**

The μ A741 is a high performance operational amplifier with high open-loop gain, internal compensation, high common mode range and exceptional temperature stability. The μ A741 is short-circuit-protected and allows for nulling of offset voltage.

FEATURES

- Internal frequency compensation
- Short circuit protection
- Excellent temperature stability
- High input voltage range

PIN CONFIGURATION**Figure 1. Pin Configuration****ORDERING INFORMATION**

DESCRIPTION	TEMPERATURE RANGE	ORDER CODE	DWG #
8-Pin Plastic Dual In-Line Package (DIP)	-55°C to +125°C	μ A741N	SOT97-1
8-Pin Plastic Dual In-Line Package (DIP)	0 to +70°C	μ A741CN	SOT97-1
8-Pin Plastic Dual In-Line Package (DIP)	-40°C to +85°C	SA741CN	SOT97-1
8-Pin Ceramic Dual In-Line Package (CERDIP)	-55°C to +125°C	μ A741F	0580A
8-Pin Ceramic Dual In-Line Package (CERDIP)	0 to +70°C	μ A741CF	0580A
8-Pin Small Outline (SO) Package	0 to +70°C	μ A741CD	SOT96-1

ABSOLUTE MAXIMUM RATINGS

SYMBOL	PARAMETER	RATING	UNIT
V_S	Supply voltage μ A741C μ A741	± 18 ± 22	V
P_D	Internal power dissipation D package N package F package	780 1170 800	mW mW mW
V_{IN}	Differential input voltage	± 30	V
V_{IN}	Input voltage ¹	± 15	V
I_{SC}	Output short-circuit duration	Continuous	
T_A	Operating temperature range μ A741C SA741C μ A741	0 to +70 -40 to +85 -55 to +125	°C °C °C
T_{STG}	Storage temperature range	-65 to +150	°C
T_{SOLD}	Lead soldering temperature (10sec max)	300	°C

NOTES:

- For supply voltages less than ± 15 V, the absolute maximum input voltage is equal to the supply voltage.

General purpose operational amplifier

μA741/μA741C/SA741C

DC ELECTRICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{V}$, unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	μA741			μA741C			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{OS}	Offset voltage	$R_S=10\text{k}\Omega$		1.0	5.0		2.0	6.0	mV
$\Delta V_{OS}/\Delta T$		$R_S=10\text{k}\Omega$, over temp.		1.0	6.0		7.5		mV
				10			10		$\mu\text{V}/^\circ\text{C}$
I_{OS}	Offset current	Over temp. $T_A=+125^\circ\text{C}$ $T_A=-55^\circ\text{C}$		20	200		20	200	nA
$\Delta I_{OS}/\Delta T$				7.0	200		300		nA
				20	500				nA
				200			200		$\text{pA}/^\circ\text{C}$
I_{BIAS}	Input bias current	Over temp. $T_A=+125^\circ\text{C}$ $T_A=-55^\circ\text{C}$		80	500		80	500	nA
$\Delta I_B/\Delta T$				30	500		800		nA
				300	1500		1		nA
				1			1		$\text{nA}/^\circ\text{C}$
V_{OUT}	Output voltage swing	$R_L=10\text{k}\Omega$	± 12	± 14		± 12	± 14		V
		$R_L=2\text{k}\Omega$, over temp.	± 10	± 13		± 10	± 13		V
A_{VOL}	Large-signal voltage gain	$R_L=2\text{k}\Omega$, $V_O=\pm 10\text{V}$ $R_L=2\text{k}\Omega$, $V_O=\pm 10\text{V}$, over temp.	50	200		20	200		V/mV
	Offset voltage adjustment range			25			15		V/mV
$PSRR$	Supply voltage rejection ratio	$R_S \leq 10\text{k}\Omega$					10	150	$\mu\text{V}/\text{V}$
		$R_S \leq 10\text{k}\Omega$, over temp.			10	150			$\mu\text{V}/\text{V}$
$CMRR$	Common-mode rejection ratio	Over temp.	70	90		70	90		dB
									dB
I_{CC}	Supply current	$T_A=+125^\circ\text{C}$ $T_A=-55^\circ\text{C}$		1.4	2.8		1.4	2.8	mA
				1.5	2.5				mA
				2.0	3.3				mA
V_{IN}	Input voltage range	(μA741, over temp.)	± 12	± 13		± 12	± 13		V
R_{IN}	Input resistance		0.3	2.0		0.3	2.0		$\text{M}\Omega$
P_D	Power consumption	$T_A=+125^\circ\text{C}$ $T_A=-55^\circ\text{C}$		50	85		50	85	mW
				45	75				mW
				45	100				mW
R_{OUT}	Output resistance			75			75		Ω
I_{SC}	Output short-circuit current		10	25	60	10	25	60	mA

General purpose operational amplifier

μA741/μA741C/SA741C

DC ELECTRICAL CHARACTERISTICS

TA = 25°C, VS = ±15V, unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	SA741C			UNIT
			Min	Typ	Max	
VOS	Offset voltage	R _S =10kΩ R _S =10kΩ, over temp.		2.0	6.0	mV
ΔV _{OS} /ΔT				7.5		mV
I _{OS}	Offset current	Over temp.	10	20	200	nA
ΔI _{OS} /ΔT				500		nA
I _{BIAZ}	Input bias current	Over temp.	200	80	500	pA/°C
ΔI _B /ΔT				1	1500	nA
V _{OUT}	Output voltage swing	R _L =10kΩ R _L =2kΩ, over temp.	±12	±14		V
A _{VOL}	Large-signal voltage gain	R _L =2kΩ, V _O =±10V R _L =2kΩ, V _O =±10V, over temp.	20	200		V/mV
	Offset voltage adjustment range		±10	±13		V
PSRR	Supply voltage rejection ratio	R _S ≤10kΩ	15	10	150	µV/V
CMRR	Common mode rejection ration		70	90		dB
V _{IN}	Input voltage range	Over temp.	±12	±13		V
R _{IN}	Input resistance		0.3	2.0		MΩ
P _d	Power consumption			50	85	mW
R _{OUT}	Output resistance			75		Ω
I _{SC}	Output short-circuit current			25		mA

AC ELECTRICAL CHARACTERISTICS

TA=25°C, VS = ±15V, unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	μA741, μA741C			UNIT
			Min	Typ	Max	
R _{IN}	Parallel input resistance	Open-loop, f=20Hz	0.3			MΩ
C _{IN}	Parallel input capacitance	Open-loop, f=20Hz		1.4		pF
	Unity gain crossover frequency	Open-loop		1.0		MHz
t _R	Transient response unity gain Rise time Overshoot Slew rate	V _{IN} =20mV, R _L =2kΩ, C _L ≤100pF C≤100pF, R _L ≥2kΩ, V _{IN} =±10V		0.3 5.0 0.5		µs % V/µs
SR						

General purpose operational amplifier

 μ A741/ μ A741C/SA741C

EQUIVALENT SCHEMATIC

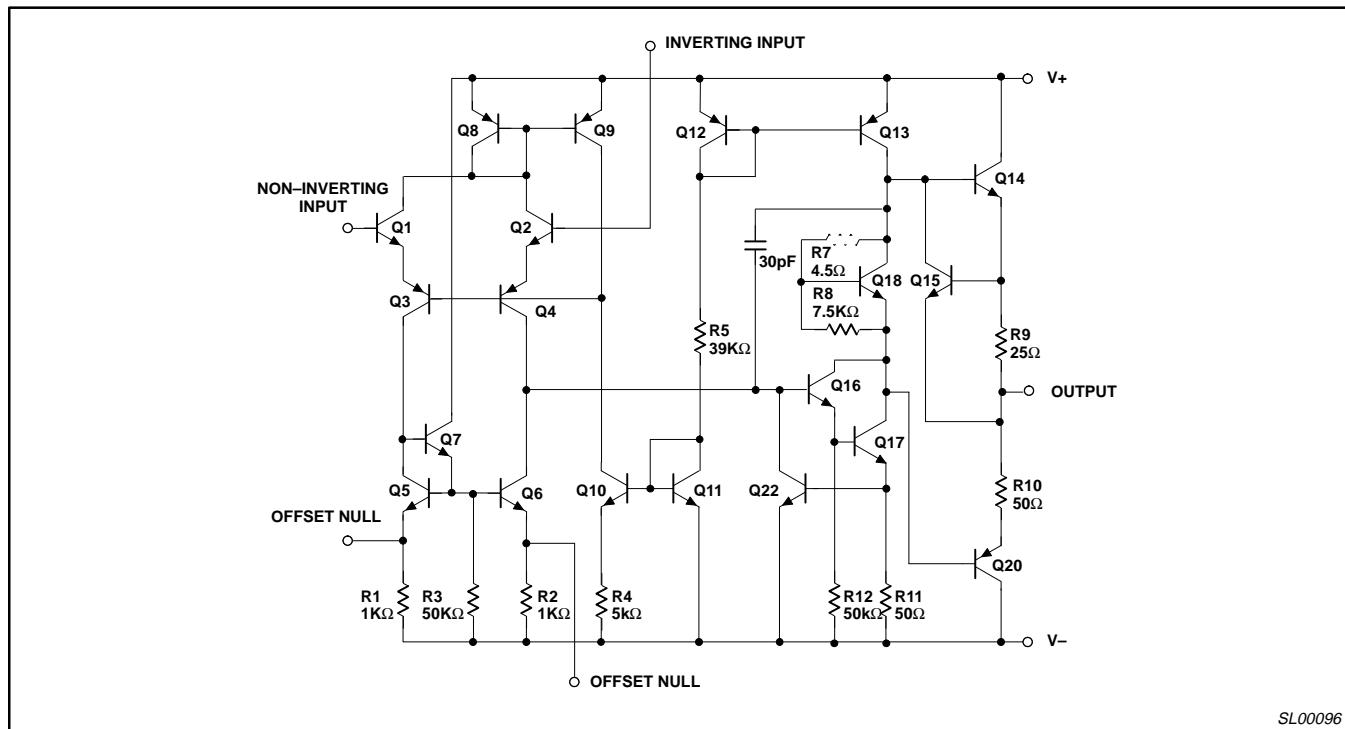



Figure 2. Equivalent Schematic

General purpose operational amplifier


 μ A741/ μ A741C/SA741C

TYPICAL PERFORMANCE CHARACTERISTICS


Output Voltage Swing as a Function of Supply Voltage

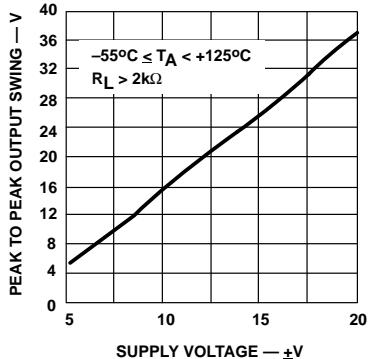


Input Common-Mode Voltage Range as a Function of Supply Voltage

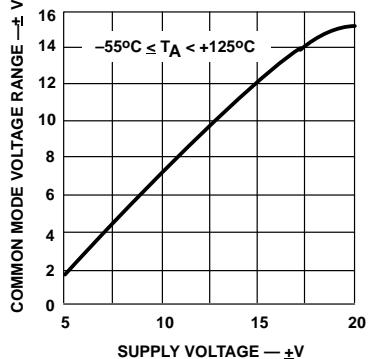


Power Consumption as a Function of Supply Voltage

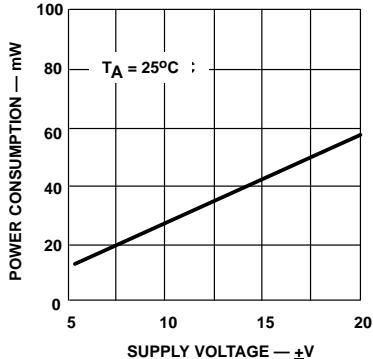


Input Bias Current as a Function of Ambient Temperature

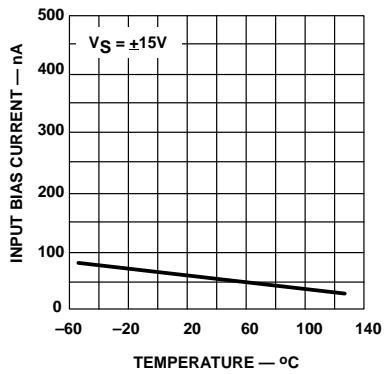


Input Resistance as a Function of Ambient Temperature

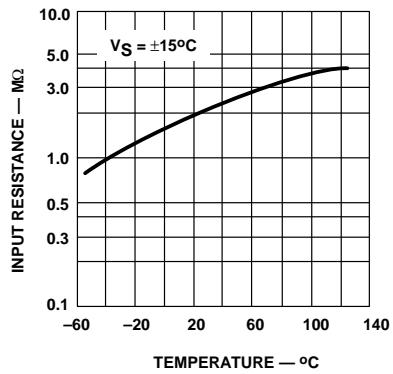


Input Offset Current as a Function of Supply Voltage

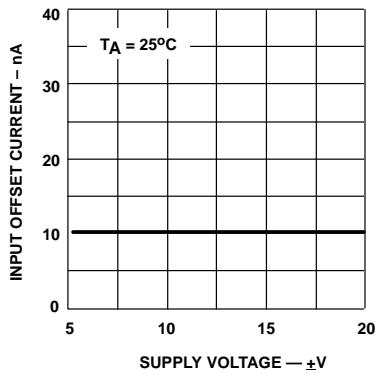

Input Offset Current as a Function of Ambient Temperature

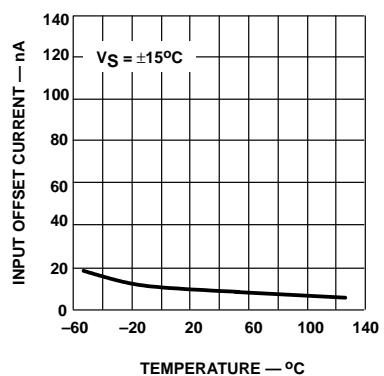

Power Consumption as a Function of Ambient Temperature

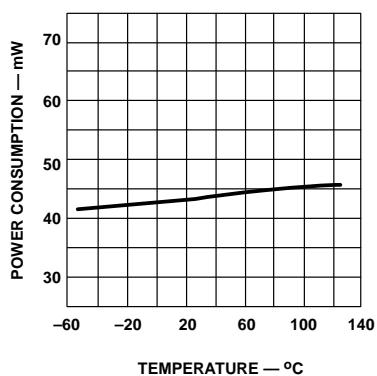

Output Voltage Swing as a Function of Load Resistance

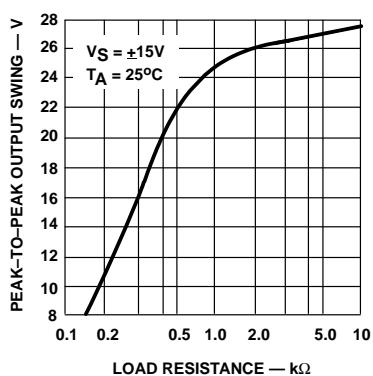










Figure 3. Typical Performance Characteristics

SL00097


General purpose operational amplifier

 μ A741/ μ A741C/SA741C

TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

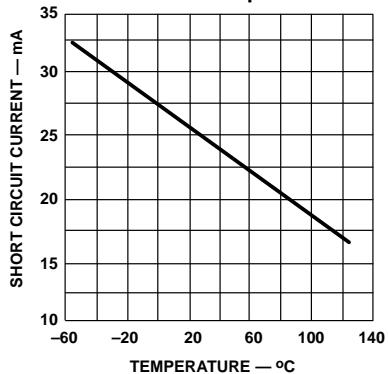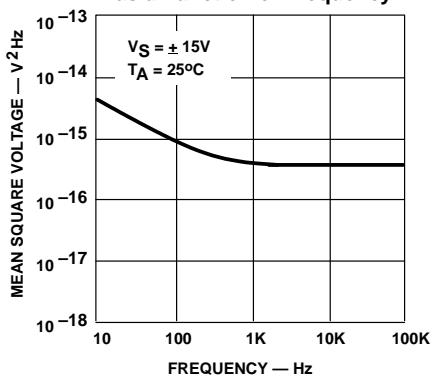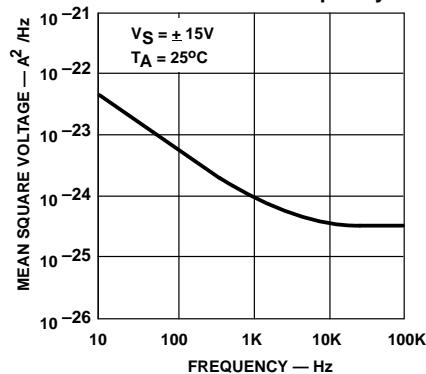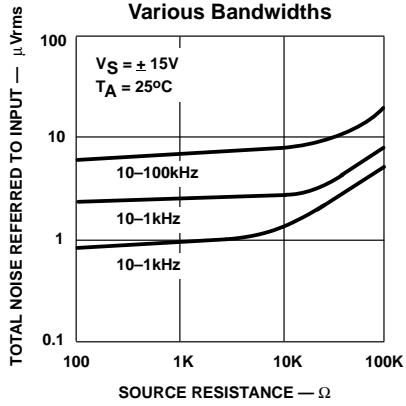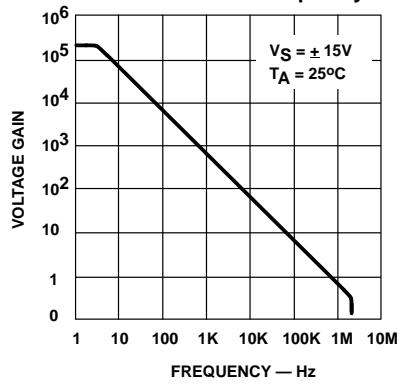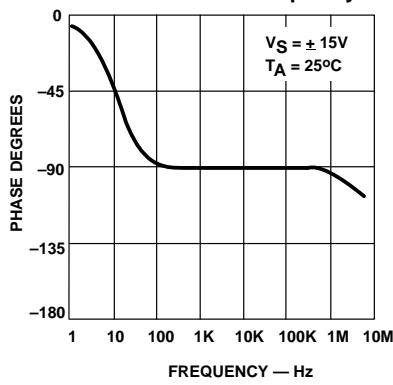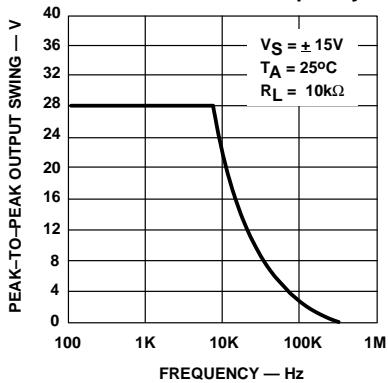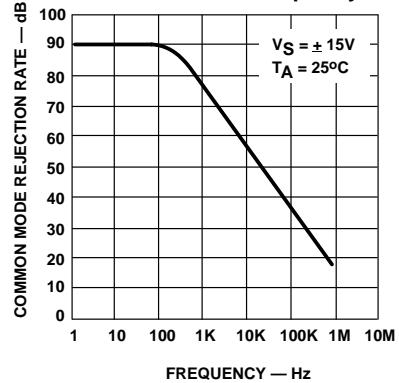Output Short-Circuit Current
as a Function of
Ambient TemperatureInput Noise Voltage
as a Function of FrequencyInput Noise Current
as a Function of FrequencyBroadband Noise for
Various BandwidthsOpen-Looped Voltage Gain
as a Function of FrequencyOpen-Looped Phase Response
as a Function of FrequencyOutput Voltage Swing
as a Function of FrequencyCommon-Mode Rejection Ratio
as a Function of Frequency

Transient Response

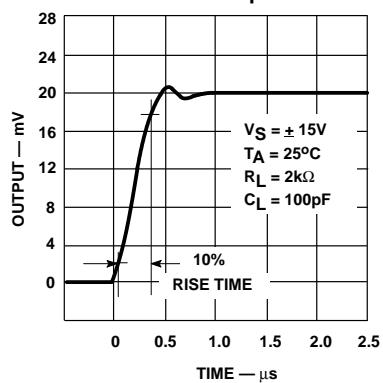

SL00098

Figure 4. Typical Performance Characteristics (cont.)

General purpose operational amplifier

 μ A741/ μ A741C/SA741C

TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

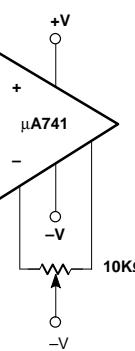
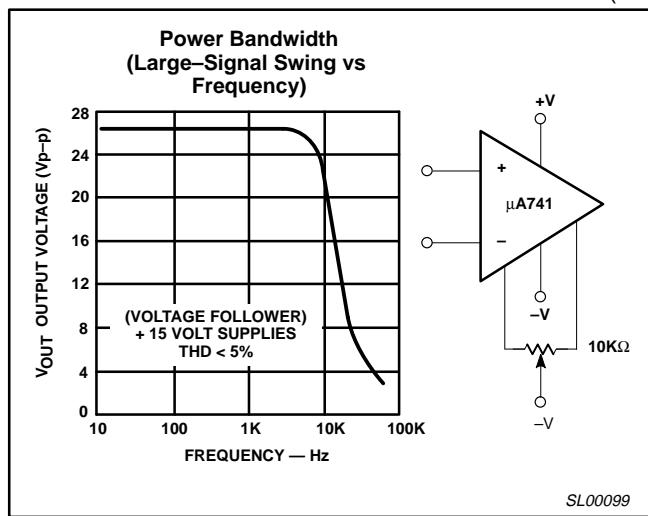


Figure 5. Typical Performance Characteristics (cont.)